

CHANNEL

LIGHTING & SAFETY SYSTEMS

i-Monitor



DALI Circular Emergency Downlight
from Channel Safety Systems



DALI Circular Emergency Downlight


A stylish and compact circular IP65 3 Watt LED Bulkhead suitable for ceiling mounting applications.

This DALI Self-Test unit is an excellent solution for tall ceiling heights in damp locations.

The unit utilises LiFePO4 battery technology which provides a far longer life than traditional battery types, making this an ideal product for difficult to maintain areas.

Features

- Surface Mount (Ceiling)
- White Polycarbonate body
- Translucent Polycarbonate Cover
- Extra Long Life LiFePO4 cells
- Ingress Protection Rating - IP65
- DDP (Deep Discharge Protection)
- Cree LEDs
- Perfect for warehouse applications

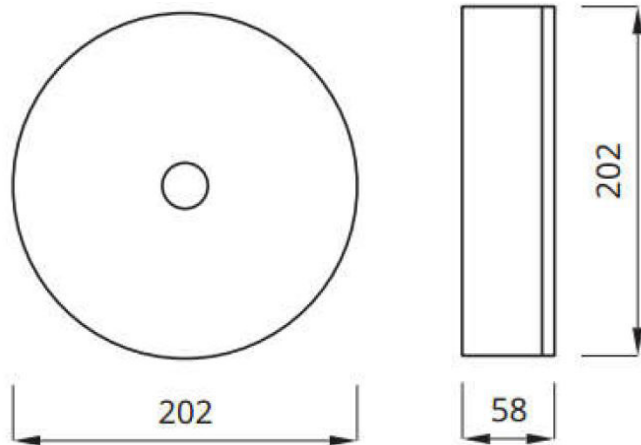

PRODUCT CODE	DESCRIPTION
CE3S/3W/DA	DALI Self-Test NM3 Circular Emergency Downlight

SPECIFICATIONS	
Mains Supply	230-240V AC 50/60 Hz
Power Rating - Non Maintained	16mA $\lambda = 0.48$
Emergency Duration	3 hours (minimum)
Recharge Period	12 Hours - Electronic
Battery Size & Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	0-150mA Float
Ingress Protection Rating	IP65
Light Output	3 Watts
Light Source	1 x 3W Cree LED
Lumen Output	390 Lumen (LTD files available)



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Errors & omissions excluded. Specification is subject to change without notice.