

CHANNEL

LIGHTING & SAFETY SYSTEMS

i-Monitor



DALI Surface Mount Exit Sign
from Channel Safety Systems



DALI Surface Mount Exit Sign

A stylish and compact Double Sided LED Exit Sign suitable for either wall or ceiling mounting.


The unit is a DALI Self-Test unit and is supplied with a Plexi glass screen printed legend plate offering an impressive 25m viewing distance. The legend panels are available in Arrow Up, Arrow Down or Arrow Left /Right.

The batteries used with this unit not only offer double the life of traditional emergency lighting batteries, but consume far less power during their operation.



Features

- Surface Mount (Wall or Ceiling)
- White Polycarbonate body
- Translucent Polycarbonate Cover
- Extra Long Life LiFePO4 cells
- Ingress Protection Rating - IP41
- Viewing distance - 25m
- ISO legends as standard
- DDP (Deep Discharge Protection)
- Samsung LEDs

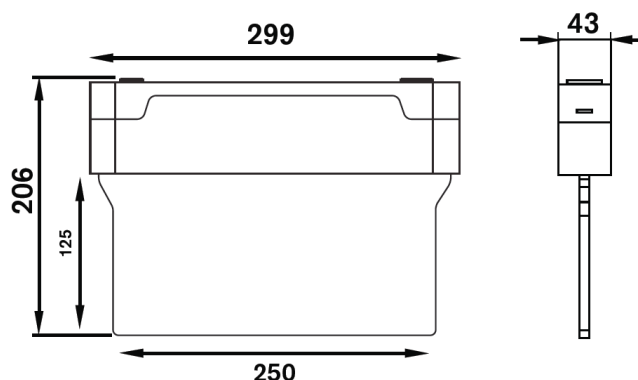

PRODUCT CODE	DESCRIPTION
CE1S/3W/DA/AU	DALI Self-Test Surface Mount Exit Sign arrow up
CE1S/3W/DA/AD	DALI Self-Test Surface Mount Exit Sign arrow down
CE1S/3W/DA/ALR	DALI Self-Test Surface Mount Exit Sign arrow left / right

SPECIFICATIONS	
Mains Supply	230-240V AC 50/60 Hz
Power Rating	40mA $\lambda = 0.6$
Emergency Duration	3 hours (minimum)
Recharge Period	12 Hours – Energy saving electronic charger
Battery Size & Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	0-400mA Float
Ingress Protection Rating	IP41
Class	Class II



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Errors & omissions excluded. Specification is subject to change without notice.