

CHANNEL

LIGHTING & SAFETY SYSTEMS

i-Monitor



DALI Suspended Exit Sign
from Channel Safety Systems



DALI Suspended Exit Sign


A stylish and compact suspended Single Sided LED Exit Sign that can either be surface mounted.

The unit is a DALI Self-Test unit and is supplied with a Plexi glass screen printed legend plate offering an impressive 30m viewing distance. The legend panels are available in Arrow Up, Arrow Down, Arrow Left or Arrow Right.

The batteries used with this unit not only offer double the life of traditional emergency lighting batteries, but consume far less power during their operation.

Features

- Suspension Mounting
- White Polycarbonate Body
- Extra Long Life LiFePO4 cells
- Ingress Protection Rating - IP40
- 30m Viewing Distance
- ISO Legends as Standard
- DDP (Deep Discharge Protection)
- Samsung LEDs

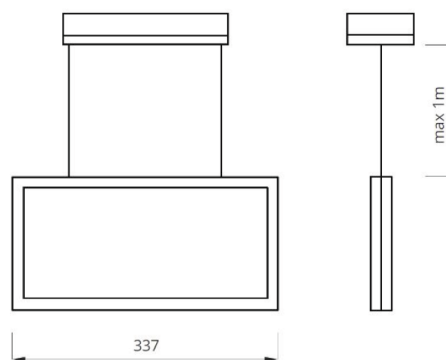

PRODUCT CODE	DESCRIPTION
CE2S/SM//3W/DA/AU	DALI Self-Test Suspended Exit Sign arrow up
CE2S/SM/3W/DA/AD	DALI Self-Test Suspended Exit Sign arrow down
CE2S/SM/3W/DA/AL	DALI Self-Test Suspended Exit Sign arrow left
CE2S/SM/3W/DA/AR	DALI Self-Test Suspended Exit Sign arrow right

SPECIFICATIONS	
Mains Supply	230-240V AC 50/60 Hz
Power Rating	40mA $\lambda = 0.6$
Emergency Duration	3 hours (minimum)
Recharge Period	12 Hours – Energy saving electronic charger
Battery Size & Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	0-400mA Float
Ingress Protection Rating	IP40
Class	Class II



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Errors & omissions excluded. Specification is subject to change without notice.