

# STRATOS-ROUND-COLD

**CHANNEL**  
LIGHTING & SAFETY SYSTEMS

## Emergency light for cold areas

E/STRATOS/RD/COLD

3 hours

LiFePo4 6.4v 3.0AH Battery Self-Test


Ideal for cold rooms, chillers or freezers, the STRATOS-ROUND COLD offer a stylish solution to meet the requirements of BS5266 2016 in areas with temperatures as low as 20°C

The STRATOS-ROUND-COLD also benefits from in built 'self-test' function, which ensures the fitting is tested to meet the required standards.


The STRATOS-ROUND-COLD offers a cost effective solution for difficult emergency lighting areas.



Dimensions [mm]

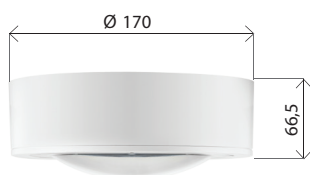


Shown with optional recessing bezel  
Accessories

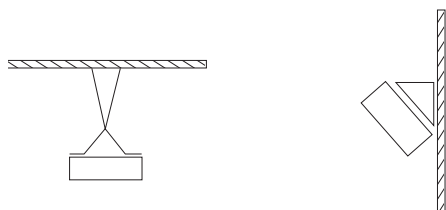

bracket for suspended  
mounting

mounting option with 30°  
bracket applied

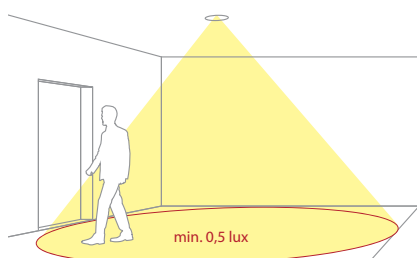

### Technical parameters

Application Antipanic lighting

light source 1 led / 2w

Battery operating time 3h

mode M/ NM

Luminous flux 245 lm / 245 lm

Testing Self test,

Power supply 210 ÷ 250 V Ac 50 ÷ 60hz;

Protection degree IP65

Insulation class II

tempeprature range -20 °c ÷ +40 °c

colour ☐ RAL 9003

### Certificates



### Photometry

[m]	A	B	C	D
2,5	3.8	9.6	9.6	3.8
3,0	4.0	10.4	10.4	4.0
4,0	4.2	11.7	11.7	4.2
5,0	4.5	12.7	12.7	4.5
6,0	4.7	13.5	13.5	4.7
7,0	4.7	14.0	14.0	4.7
8,0	4.5	14.5	14.5	4.5
9,0	4.5	14.3	14.3	4.5
10,0	4.0	14.9	14.9	4.0

