# CHANNEL

LIGHTING & SAFETY SYSTEMS

## **ALPINE SLIM**







LED emergency exit signage from Channel Safety Systems







## **Emergency Exit Sign**

The Alpine Slim utilises LED technology for low cost, high output, emergency illumination.

#### **Features**


- Maintained or Non-maintained 3 hour emergency back-up
- 5 downward pointing LEDs to illuminate exit door.
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Lightweight & easy to install
- Low environmental impact
- Minimal maintenance
- Supplied with full legend set



### **Optional Remote Control**

- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power



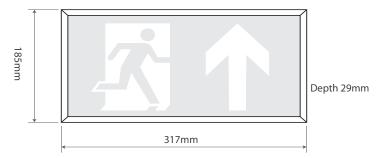



Note: Image not to scale and for pictorial reference only

SPECIFICATIONS	
Light Source	SMT LED 4W
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz ± 10%
Mains Current	(max) 150mA (max) 35mA quiescent (3W)
Recharge Period	Less than 24 hour
Charge Indicator	Integral green LED & red fault LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	650gm
Battery	3.6V 800mAh Nickel Cadmium
Material & Finish	Polycarbonate construction, white finish

PRODUCT CODE	DESCRIPTION
E/AL/M3/SL/RC	Alpine Slim LED exit sign c/w full legend set
E/EM/RC	Remote control test unit (Optional)



www.channelsafety.co.uk
Tel: 0845 884 7000
Email: sales@channelsafety.co.uk

Errors & ommissions excluded. Specification is subject to change without notice.