



Milan



LED luminaire
from Channel Safety Systems



RC



LED Emergency Luminaire

The Milan range of 15w circular LED Lumiaires offers a complete range of low profile polycarbonate IP65 light fittings. It is supplied as standard with 3 colour temperature options, 3000K, 4000K & 6000K

The Milan range comes in a white finish as standard but is further enhanced with, black, chrome or brass coloured bezel options.

Available in both mains only and emergency options a microwave sensor option with corridor function is also available, The Milan range is also available with emergency remote testing option.

Features

- 3 colour temperature options 3000k, 4000k & 6000k
- Microwave with corridor function options
- Remote Control emergency testing option
- Versatile multi-functional use, interior & exterior
- May be mounted in any orientation
- Tough polycarbonate housing
- Twist on diffuser.
- Mains only & Maintained emergency options
- Minimal maintenance
- Easy installation
- IP65 ingress protection
- RoHS compliant
- IP65 ingress protection
- Excellent luminaire spacings

Please note


Under the Regulatory Reform Order (RRO - Fire Safety Order 2005) the servicing and maintenance of escape routes falls upon the Appointed Responsible person, to ensure your property is complying with current legislations.

New legal requirements specify that all emergency lighting must have a full 3 hour duration test once a year. Channel's Technical Services Division work to British Standards (BS-5266) in



www.channelsafety.co.uk

Tel: 0845 884 7000

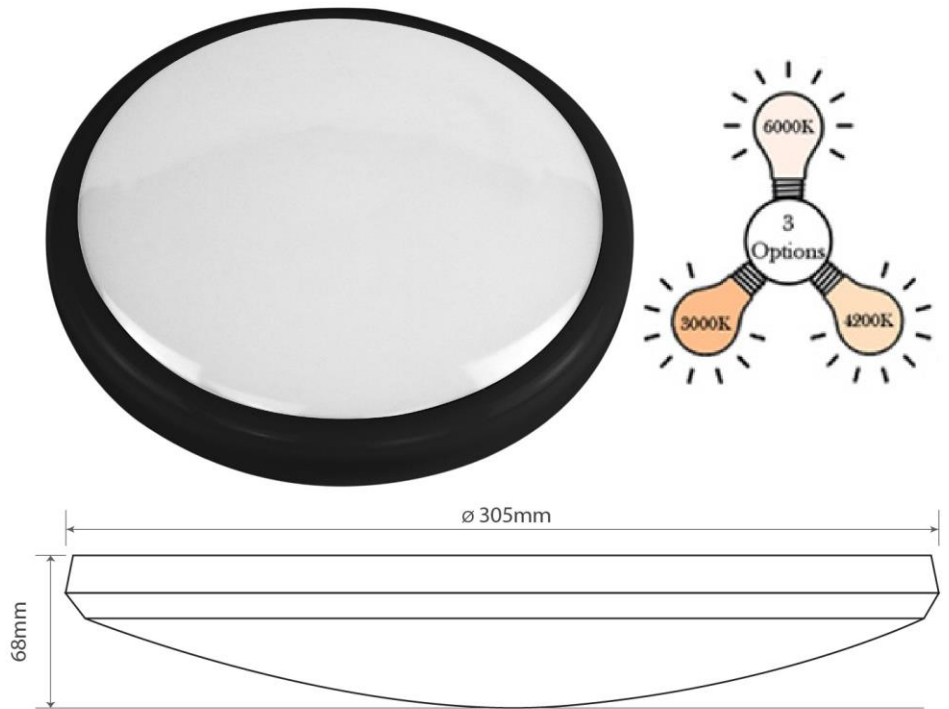

PHOTOMETRIC SPACING DATA (1 lux)

Emergency Mounting height	↔	↔	↔	↔
2.5m	4.3	10.00	10.00	4.3
4m	4.8	11.40	11.40	4.8

SPECIFICATIONS

Light Source	SMT LED 120pcs
Colour Temperatures	3000K, 4000K, 6000K (selctable)
IP Rating	IP 65
Emergency Duration (if selected)	3 hours (minimum)
Mains Voltage	230V 50Hz ± 10%
Mains Current	(max) 450mA (max) 200mA quiescent (3W)
Recharge Period	Less than 24 hour
Charge Indicator Integral green LED	Integral green charge LED(Emergency units)
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	0 to 40°C
Weight	1.08Kg
Battery	3.6V 3000mAh Nickel Cadmium
Material & Finish	Polycarbonate construction, white finish
Lumen Output	Mains operation 1400Lm - Emergency operation 132Lm

PRODUCT CODE	DESCRIPTION
E/MILAN	Milan Led 15w Mains only Light
E/MILAN/M3	Milan Led 15w 3 Hour Maintained Emergency Light
E/MILAN/MW	Mains LED 15w Mains only Light c/w Microwave Sensor
E/MILAN/M3/MW	Milan Led 15w Emergency Microwave 3 Hour Maintained Emergency Light
E/MILAN/M3/RC	Milan Led 15w 3 Hour Maintained Emergency Light-REMOTE CONTROL
E/MILAN/M3/MW/RC	Milan Led 15w Emergency Microwave 3 Hour Maintained Emergency Light - REMOTE CONTROL OPTION
E/EM/RC	REMOTE CONTROL OPTION
E/MILAN/BEZ/CH	Milan Chrome Bezel
E/MILAN/BEZ/BR	Milan Brass bezel
E/MILAN/BEZ/BK	Milan Black bezel
E/MILAN/EYE/WH	Milan White eyelid bezel
E/MILAN/EYE/BK	Milan Black eyelid bezel