


CHANNEL

LIGHTING & SAFETY SYSTEMS

i-Monitor

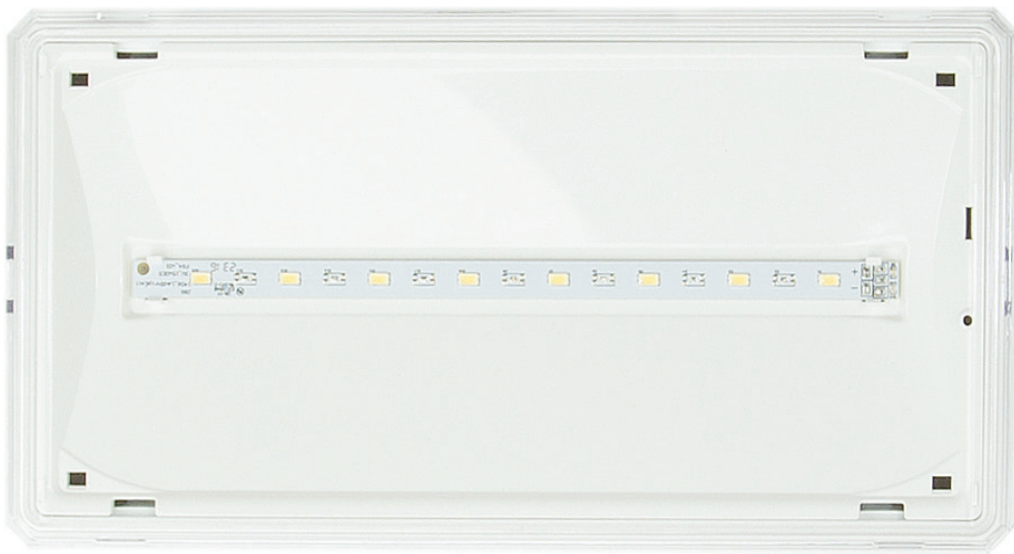

DALI Rectangular Emergency Downlight
from Channel Safety Systems



DALI Rectangular Emergency Downlight



A stylish and compact IP65 rated 3 Watt LED luminaire suitable for mounting a number of different ways.

This is a DALI Self-Test unit. The fitting is not only more compact than the majority of LED bulkheads, but also offers an impressive 350 lumens.

The batteries used with this unit not only offer double the life of traditional emergency lighting batteries, but consume far less power during their operation.

Features

- Surface Mount (Wall or Ceiling)
- Optional recessed (Wall or Ceiling)
- Optional pendant (Ceiling)
- White Polycarbonate body
- Translucent Polycarbonate Cover
- Extra Long Life LiFePO4 cells
- Ingress Protection Rating - IP65
- DDP (Deep Discharge Protection)
- Samsung LEDs

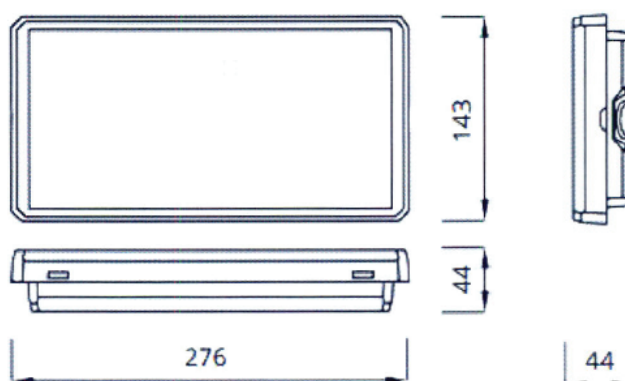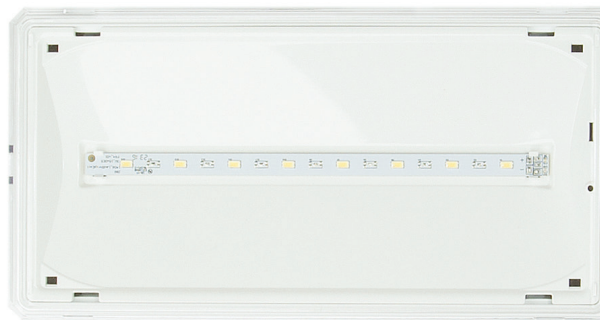

PRODUCT CODE	DESCRIPTION
E/BHDA/2	DALI Self-Test Square IP 65 High Output Bulkhead

SPECIFICATIONS	
Mains Supply	230-240V AC 50/60 Hz
Power Rating - Maintained	40mA $\lambda = 0.6$
Power Rating - Non Maintained	16mA $\lambda = 0.48$
Emergency Duration	3 hours (minimum)
Recharge Period	12 Hours – Energy saving electronic charger
Battery Size & Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	Dual Rate Charge 0-400mA
Ingress Protection Rating	IP65
Light Output	3 Watts
Light Source	8 pcs Samsung LED
Lumen Output	350 Lumens (LDT files available)



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Errors & omissions excluded. Specification is subject to change without notice.