

alpine[®]



The new LED emergency exit sign from
Channel Safety Systems



LED Emergency Exit Sign

alpine


The stylish Alpine Emergency Exit sign utilises the latest LED technology for low-cost, high power, emergency illumination.

Features

- Uses 27x 0.07W LEDs
- 8W fluorescent equivalent
- 30,000 hour life expectancy
- Lightweight & easy to install
- Sleek & minimalistic design
- Maintained or non-maintained operation
- Prismatic diffuser on underside to illuminate door etc
- Polycarbonate construction
- Incorporates 3.6V 1.5Ah NiCd battery
- Low environmental impact
- Low running costs
- Minimal maintenance



STOCK CODE	DESCRIPTION
E/AL/M3/LED	Alpine LED exit sign c/w legend arrow up
E/PIC/AL/AD	Alpine pictogram legend arrow down
E/PIC/AL/AL	Alpine pictogram legend arrow left
E/PIC/AL/AR	Alpine pictogram legend arrow right
E/PIC/AL/AU	Alpine pictogram legend arrow up

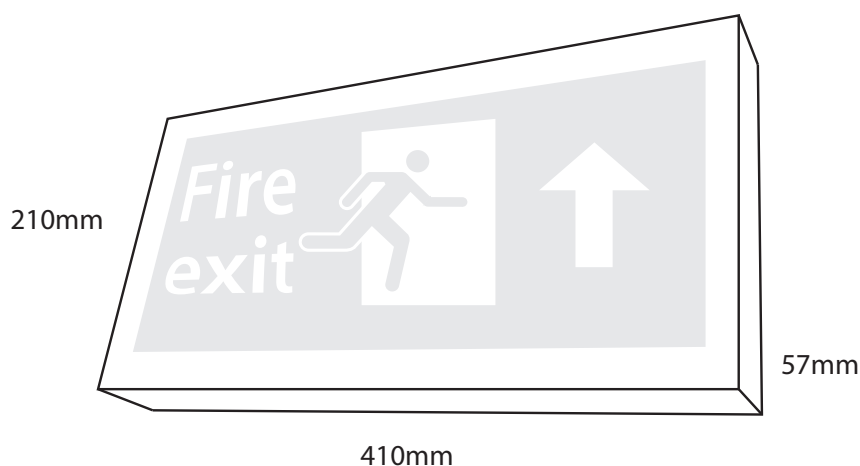

SPECIFICATIONS	
Light Source	27 x 0.07W LED (Total 1.9W)
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V +-10% 50Hz/60Hz
Mains Current (max)	150mA (max) 35mA quiescent (3W)
Recharge Period	Less than 24 hours
Charge Indicator	Integral green LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weights	800g
Dimensions (mm)	410mm wide x 210mm high x 55mm deep
Accessories	Arrow up, down, left & right legends
Battery	3.6V 1500mAh Nickel Cadmium

www.channelsafety.co.uk

Tel. 0845 884 7000

Email. sales@channelsafety.co.uk