

# CHANNEL

LIGHTING & SAFETY SYSTEMS

## i-Monitor



**DALI Recessed Exit Sign**  
from Channel Safety Systems



# DALI Recessed Exit Sign


*A stylish and compact Double Sided LED Exit Sign suitable for ceiling recess mount applications.*

*The unit is a DALI Self-Test unit and is supplied with a Plexi glass screen printed legend plate offering an impressive 25m viewing distance. The legend panels are available in Arrow Up, Arrow Down or Arrow Left /Right.*

*The batteries used with this unit not only offer double the life of traditional emergency lighting batteries, but consume far less power during their operation.*

## Features

- Recessed mounting
- White Polycarbonate body
- Translucent Polycarbonate Cover
- Extra Long Life LiFePO4 cells
- Ingress Protection Rating - IP41
- Viewing distance - 25m
- ISO legends as standard
- DDP (Deep Discharge Protection)
- Samsung LEDs

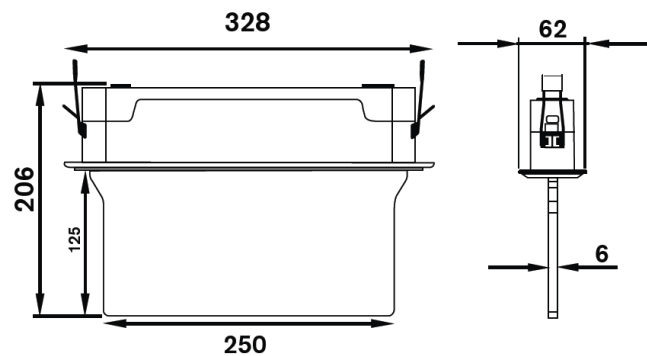

PRODUCT CODE	DESCRIPTION
CE1R/3W/DA/AU	DALI Self-Test Recessed Exit Sign arrow up
CE1R/3W/DA/AD	DALI Self-Test Recessed Exit Sign arrow down
CE1R/3W/DA/ALR	DALI Self-Test Recessed Exit Sign arrow left / right

SPECIFICATIONS	
Mains Supply	230-240V AC 50/60 Hz
Power Rating - Maintained	40mA $\lambda = 0.61$
Emergency Duration	3 hours (minimum)
Recharge Period	12 Hours – Energy saving electronic charger
Battery Size & Type	9.6V 1.5Ah LiFePO4 Cells
Charge Current	0-400mA Float
Ingress Protection Rating	IP41
Class	Class II



**www.channelsafety.co.uk**

**Tel: 0845 884 7000**

**Email: sales@channelsafety.co.uk**

Errors & omissions excluded. Specification is subject to change without notice.