

STRATOS Cold

Emergency light for cold areas




Model
E/STRATOS/COLD 3 hours LiFePo4 6.4v 4.5AH Battery Self-Test


Ideal for cold rooms, chillers or freezers, the STRATOS-COLD offer a stylish solution to meet the requirements of BS5266 2016

The STRATOS-COLD also benefits from in built 'self-test' function, which ensures the fitting is tested to meet the required standards.

Supplied with a full set of exit legends as standard the STRATOS-COLD offers a cost effective solution for difficult emergency lighting areas.

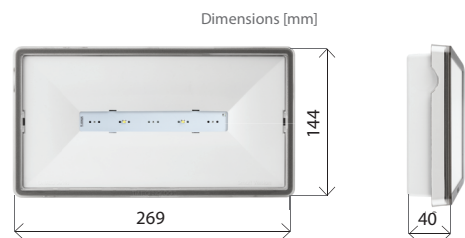

universal pictogram included




Accessories



option with recessed mount kit applied

mounting option with 30° bracket applied

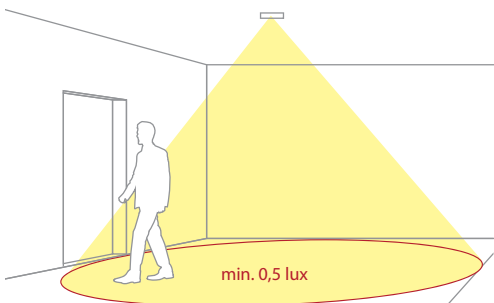

Technical parameters	Certificates
light source	214led / 2w
Battery operating time	3 hours
mode	M / NM
Luminous flux	235 lm / 218 lm
Power supply	210 ±250 V Ac 50 ±60hz; 186 ±254 V Dc
Protection degree	IP65
Insulation class	ii
temperature range	t -20 °c ÷ +40 °c
colour	□ ral 9003



Photometry

[m]	A	B	C	D
2,5	3.7	9.0	9.0	3.7
3,0	4.0	9.6	9.6	4.0
4,0	4.3	11.4	11.4	4.3
5,0	4.6	12.5	12.5	4.6
6,0	4.7	13.4	13.4	4.7
7,0	4.8	14.1	14.1	4.8
8,0	4.8	14.5	14.5	4.8
9,0	4.5	14.8	14.8	4.5
10,0	4.0	15.2	15.2	4.0

